



TM

VITAL

Electrocomp



Google Us : Vital Connectors

Manufacturer of PCB Terminal Blocks, Fuse Holders, Barrier Terminals, & Switches


Micro Switches

Series VMS FPB

Lug/Screw Type




FINGER PUSH BUTTON LUG TYPE

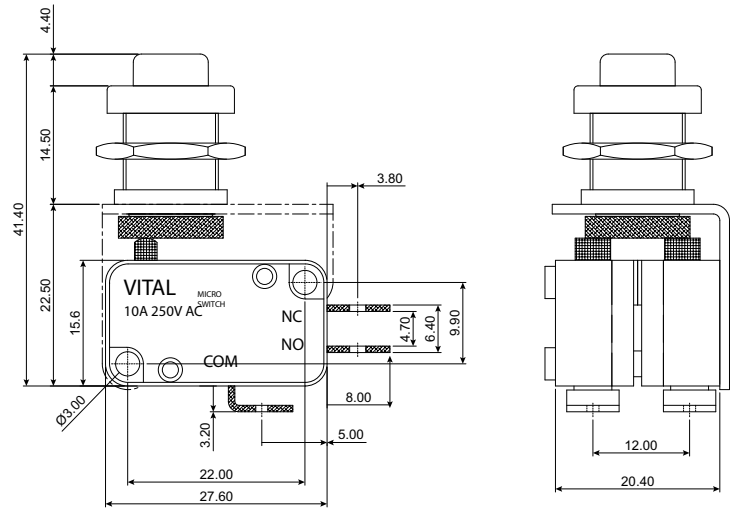

TECHNICAL SPECIFICATIONS :

Moulded Material	: PA66 - UL94 V0 or V2
Operating Temperature	: -20° C to +80°C
Mechanical Endurance	: 1 million Cycles
Electrical Endurance	: mA - 100k Cycles
	: 1 A to 4A - 10K to 20k Cycles
	: 10 A - 6000 Cycles (Silver Rivets)
Operating Force From	: 50 gms to 450 gms available
	: *Force reflecting basic switch only
Terminals	: Nickel or Tin or Silver plated Copper Alloy
Standard Rivets	: Electrolytic Copper/Bi-metallic Silver
Contact Resistance	: <20 mΩ
Dielectric Strength	: > 2 kV
Insulation Resistance	: 2000 MΩ @ 500 Vdc
Screw	: Brass Nickel Plated
	: MS Zinc plated (RoHS)
Color	: Black, Red, Yellow, Blue, Green
Connection Type	: Lug Type or Screw Type

FINGER PUSH BUTTON SCREW TYPE

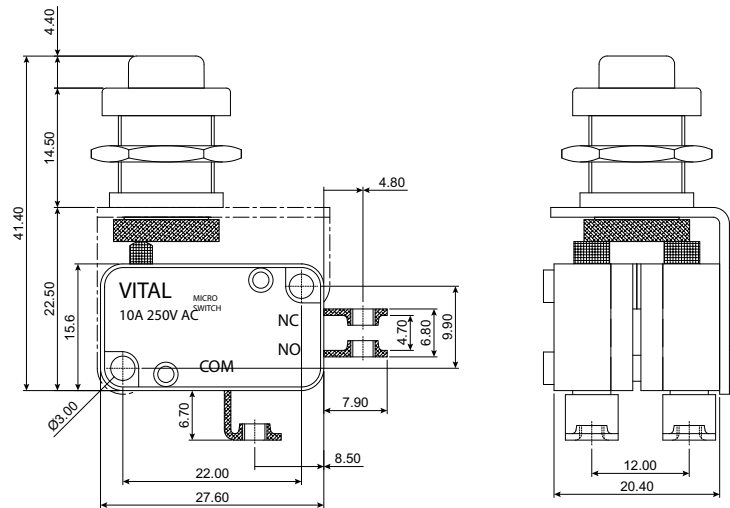

Off/Works: 830/2, GIDC Estate, Makarpura, Vadodara- 390010

Office: +91 - 9227979802 / 4

Sales: +91-9227979801

Email: sales@vitalelectrocomp.com

Web: www.vitalelectrocomp.com

Note: Technical specifications are subject to change without prior notice

Copyright© 2024 by Vital Electrocomp. All Rights Reserved