



TM

VITAL

Electrocomp




Google Us : Vital Connectors

Manufacturer of PCB Terminal Blocks, Fuse Holders, Barrier Terminals, & Switches


Series 50 MS

[Model : 50/2 MS, 50/3 MS]


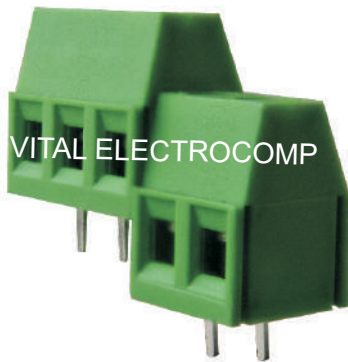


Screw Type(Cage-Clamp Design) Connectors

50/3 MS

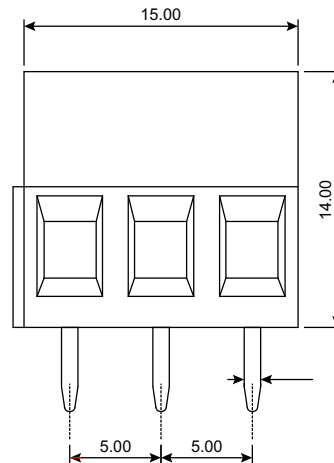

50/2 MS

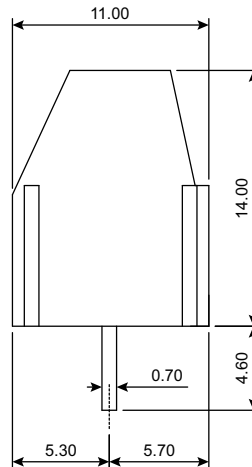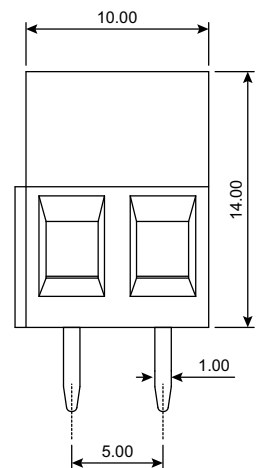

TECHNICAL SPECIFICATIONS :

Pitch	: 5.00 mm
Nominal Rating	: 10A/300V
Dielectric Strength	: >2 kV
Moulded Material	: PA66
Insulation Resistance	: >1000 M Ω @ 500 Vdc
Terminal	: Tin Plated Copper Alloy Suffix "MS" : Tin Plated MS Suffix "MS MS"
Wire Cage	: MS Zinc Plated
Screw	: M2.5 x 0.45 mm : MS Trivalent Zinc Plated Suffix "MS"
Wire Size	: 2.5 mm ²
Maximum Torque	: 0.2 - 0.25 Nm

ORDERING CODE

Series	Poles	Grade
--------	-------	-------

→ 50/2 MS ←

Grade: MS & MS MS

MS: Mild Steel

MS = Iron Cage

MS MS = Iron Cage & Iron Terminal

Approval Data

CE :10A / 300V

Off/Works: 830/2, GIDC Estate, Makarpura, Vadodara- 390010

Office: +91 - 9227979802 / 4

Sales: +91-9227979801

Email: sales@vitalelectrocomp.com

Web: www.vitalelectrocomp.com

Note: Technical specifications are subject to change without prior notice

Copyright© 2024 by Vital Electrocomp. All Rights Reserved