



TM

VITAL

Electrocomp




Google Us : Vital Connectors




Manufacturer of PCB Terminal Blocks, Fuse Holders, Barrier Terminals, & Switches

Pluggable Connectors

Series PFT H-2.54

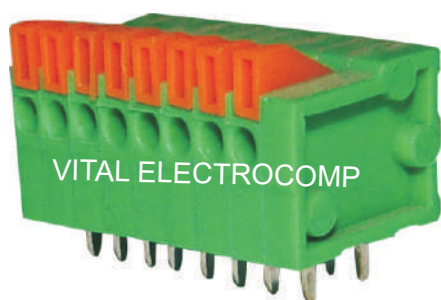

Picture shows 8 pole version of the product

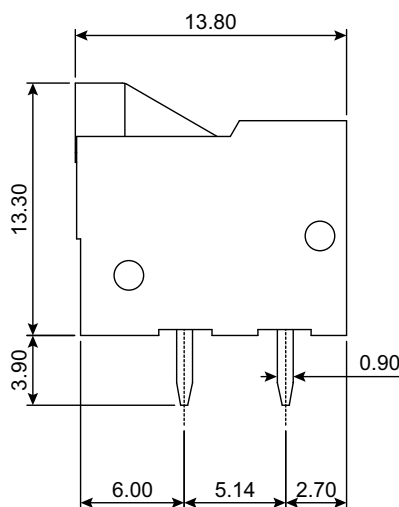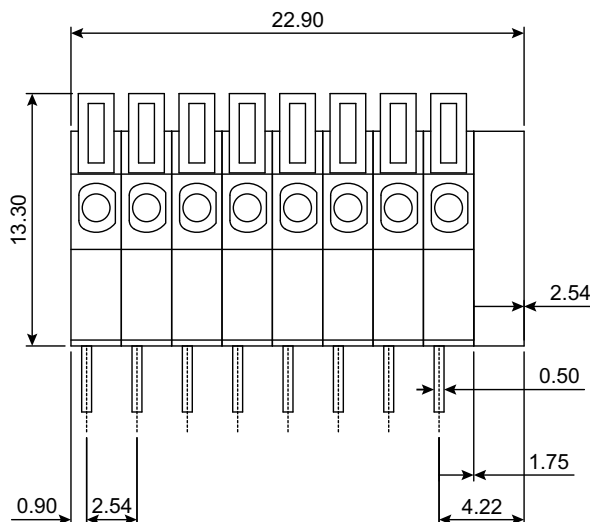

TECHNICAL SPECIFICATIONS :

Pitch	: 2.54 mm x 5.12 mm
Nominal Rating	: 2A/150V
Dielectric Strength	: >1.5 kV
Moulded Material	: PA66 - UL94 V0 or V2
Insulation Resistance	: >1000 M Ω @ 500 Vdc
Terminal	: Tin Plated Copper Alloy
Spring	: Stainless Steel 300 Series Grade
Wire Size	: 0.5 mm ²
Push Force Required	: 10 N

ORDERING CODE

Series	Poles	Pitch
--------	-------	-------

PFT H/n-2.54

Where n = number of poles

Approval Data

CE :4A / 150V / 28-20 AWG

Off/Works: 830/2, GIDC Estate, Makarpura, Vadodara- 390010

Office: +91 - 9227979802 / 4

Sales: +91-9227979801

Email: sales@vitalelectrocomp.com

Web: www.vitalelectrocomp.com

Note: Technical specifications are subject to change without prior notice

Copyright© 2024 by Vital Electrocomp. All Rights Reserved