



TM

VITAL

Electrocomp



Google Us : Vital Connectors

Manufacturer of PCB Terminal Blocks, Fuse Holders, Barrier Terminals, & Switches


Series DDR MS

[Model : DDR/2 MS, DDR/3 MS]



Screw Type(Cage-Clamp Design) Connectors



DDR/3 MS

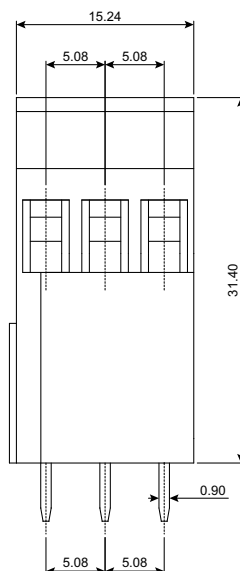

DDR/2 MS

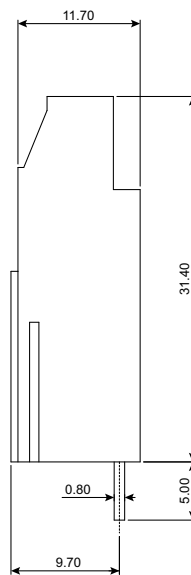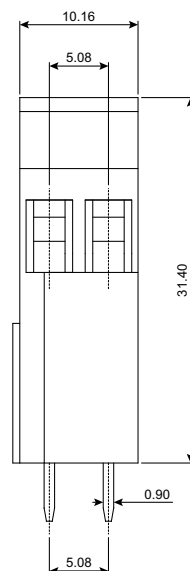

TECHNICAL SPECIFICATIONS :

Pitch	: 5.08 mm
Nominal Rating	: 10A/300V
Rate Voltage	: 300V
Dielectric Strength	: >2 kV
Moulded Material	: PA66
Insulation Resistance	: >1000 M Ω @ 500 Vdc
Terminal	: Tin Plated Copper Alloy
Wire Cage	: Nickel Plated Brass
Screw	: M2.5 x 0.45 mm : MS Zinc Plated Suffix "C"
Wire Size	: 2.5 mm ²
Maximum Torque	: 0.2 - 0.25 Nm

Approval Data

CE :20A / 300V / 12-26 AWG

ORDERING CODE

Series	Poles	Grade
--------	-------	-------

DDR/2 MS

Number of Poles: 2 or 3

Grade: MS

MS = Mild Steel

Off/Works: 830/2, GIDC Estate, Makarpura, Vadodara- 390010

Office: +91 - 9227979802 / 4

Sales: +91-9227979801

Email: sales@vitalelectrocomp.com

Web: www.vitalelectrocomp.com

Note: Technical specifications are subject to change without prior notice

Copyright© 2024 by Vital Electrocomp. All Rights Reserved