



TM

VITAL

Electrocomp




Google Us : Vital Connectors

Manufacturer of PCB Terminal Blocks, Fuse Holders, Barrier Terminals, & Switches

Series COM 90 F


Pluggable Connectors

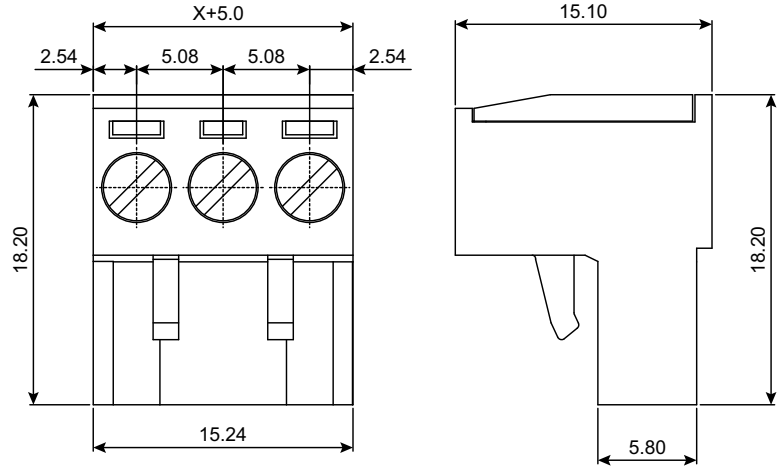

Picture shows 2 & 8 pole version of the product

TECHNICAL SPECIFICATIONS :

Pitch	: 5.08 mm
Nominal Rating	: 15A/300V
Dielectric Strength	: >2 kV
Moulded Material	: Polyamide (Nylon)66 - UL94 V0 or V2
Insulation Resistance	: >1000 M Ω @ 500 Vdc
Terminal	: Tin Plated Copper Alloy
Wire Cage	: Nickel Plated Brass
Screw	: M3 x 0.50 mm
	: Brass Nickel Plated Suffix "P"
	: MS Trivalent Zinc Plated Suffix "C"
Wire Size	: 2.5 mm ²
Maximum Torque	: 0.50 - 0.60 Nm



ORDERING CODE

Series	Poles	Grade
--------	-------	-------

COM 90/n F P

Number of Poles: 2 to 14
Grade: P or C

P= Professional Grade
C= Economy Grade

Approval Data

UL :300V / 12A / 28-12 AWG
cUL :300V / 12A / 28-12 AWG
CE :300V / 15A / 28-12 AWG

Off/Works: 830/2, GIDC Estate, Makarpura, Vadodara- 390010

Office: +91 - 9227979802 / 4 | Sales: +91-9227979801

Email: sales@vitalelectrocomp.com | Web: www.vitalelectrocomp.com

Note: Technical specifications are subject to change without prior notice

Copyright© 2024 by Vital Electrocomp. All Rights Reserved