




Manufacturer of PCB Terminal Blocks, Fuse Holders, Barrier Terminals, & Switches

Micro Switches

Series VMS FPB Dual
Screw Type

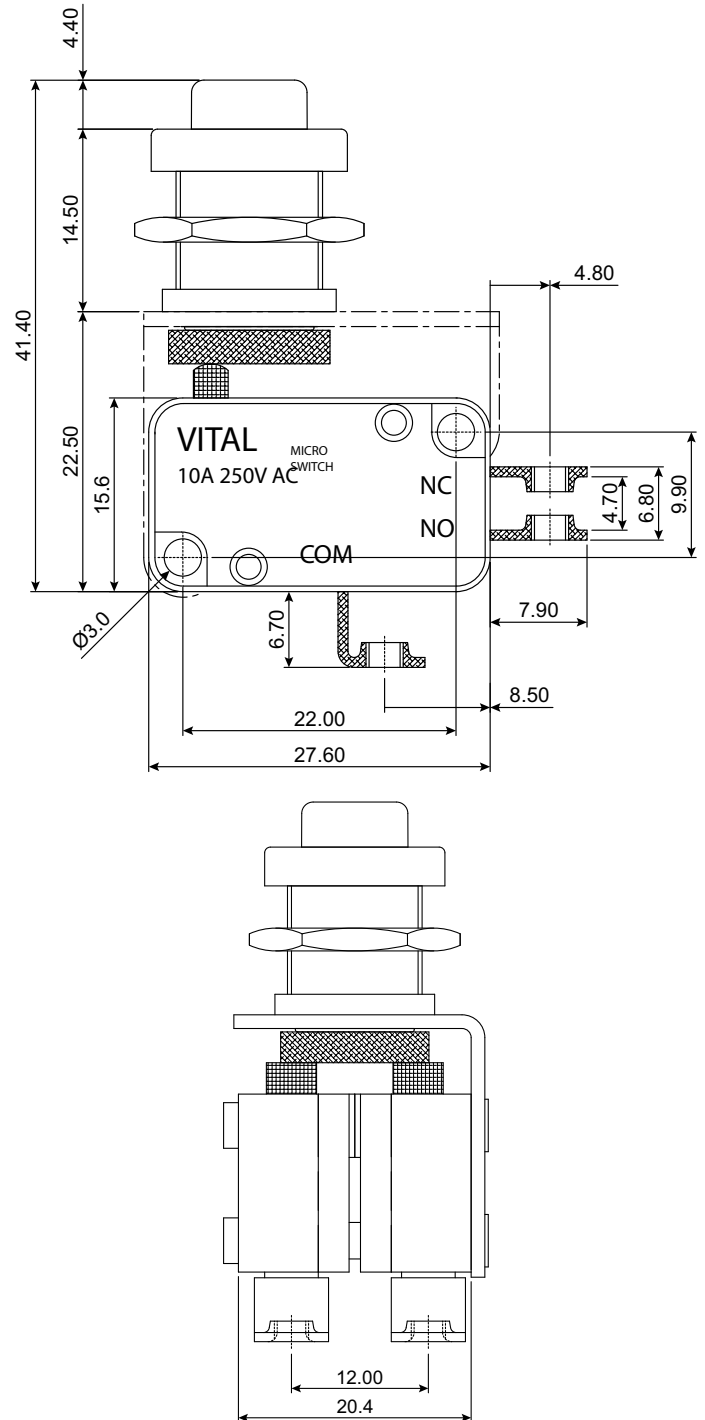

TECHNICAL SPECIFICATIONS :

Moulded Material	: PA66 - UL94 V0 or V2
Operating Temperature	: -20° C to +80°C
Electrical Endurance	: mA - 100k Cycles : 1 A to 4A - 10K to 20k Cycles : 10 A - 6000 Cycles (Silver Rivets)
Operating Force From	: 50 gms to 450 gms available : *Force reflecting basic switch only
Terminals	: Nickel or Tin or Silver plated Copper Alloy
Standard Rivets	: Electrolytic Copper/Bi-metallic Silver
Contact Resistance	: <20 mΩ
Dielectric Strength	: > 2 kV
Insulation Resistance	: 2000 MΩ @ 500 Vdc
Screw	: Brass Nickel Plated : MS Zinc plated (RoHS)
Color	: Black, Red, Yellow, Blue, Green
Connection Type	: Screw Type or Lug Type

Off/Works: 830/2, GIDC Estate, Makarpura, Vadodara- 390010

Office: +91 - 9227979802 / 4 | **Sales: +91-9227979801**

Email: sales@vitalelectrocomp.com | Web: www.vitalelectrocomp.com