



TM

VITAL

Electrocomp



Google Us : Vital Connectors

Manufacturer of PCB Terminal Blocks, Fuse Holders, Barrier Terminals, & Switches


Pluggable Connectors

Series COM ST [O] M



[O] = Open Type (Without Side Walls)

COM ST/3 [O] M

COM ST/2 [O] M

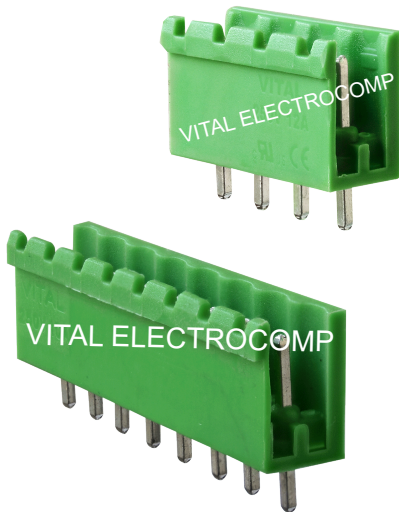


Picture shows 4 & 8 pole version of the product

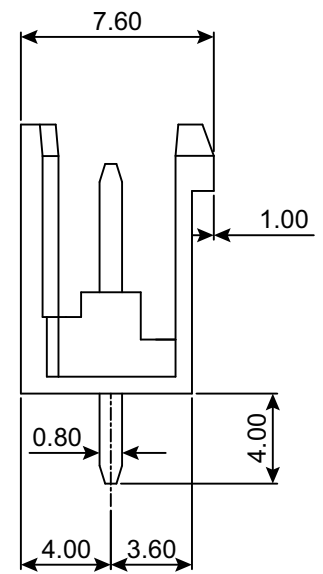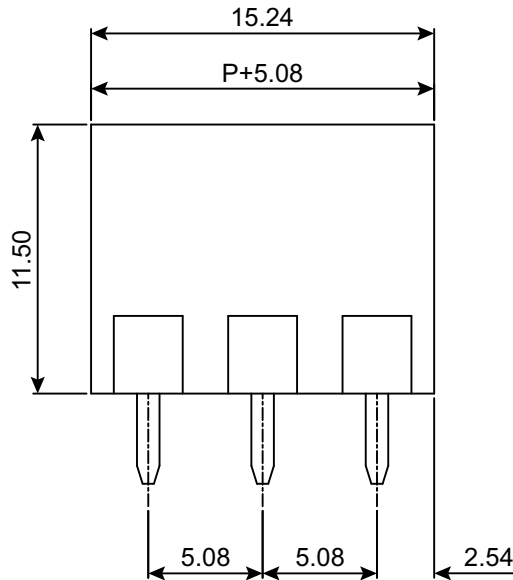

TECHNICAL SPECIFICATIONS :

Pitch	: 5.08 mm
Nominal Rating	: 15A/300V
Dielectric Strength	: >2 kV
Moulded Material	: PA66 - UL94 V0 or V2
Insulation Resistance	: >1000 M Ω @ 500 Vdc
Terminal	: Tin Plated Copper Alloy

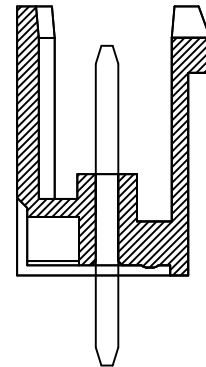

ORDERING CODE

Series	Poles	Grade
--------	-------	-------

COM ST/n [O] M P

Number of Poles: 2 to 8

Grade: P or C

P= Professional Grade

C= Economy Grade

Approval Data

UL : 300V / 12A / 28-12 AWG

cUL : 300V / 12A / 28-12 AWG

CE : 300V / 15A / 28-12 AWG

Off/Works: 830/2, GIDC Estate, Makarpura, Vadodara- 390010

Office: +91 - 9227979802 / 4

Sales: +91-9227979801

Email: sales@vitalelectrocomp.com

Web: www.vitalelectrocomp.com

Note: Technical specifications are subject to change without prior notice

Copyright© 2024 by Vital Electrocomp. All Rights Reserved