



TM

VITAL

Electrocomp



Google Us : Vital Connectors

Manufacturer of PCB Terminal Blocks, Fuse Holders, Barrier Terminals, & Switches


Pluggable Connectors

Series COM 90 [O] M



[O] = Open Type (Without Side Walls)

COM 90/3 [O] M

COM 90/2 [O] M

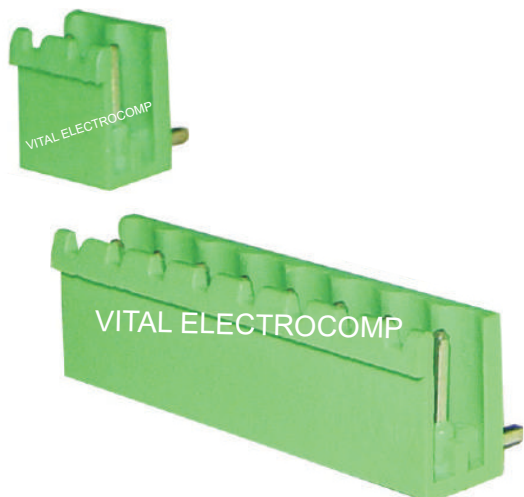

Picture shows 2 & 8 pole version of the product

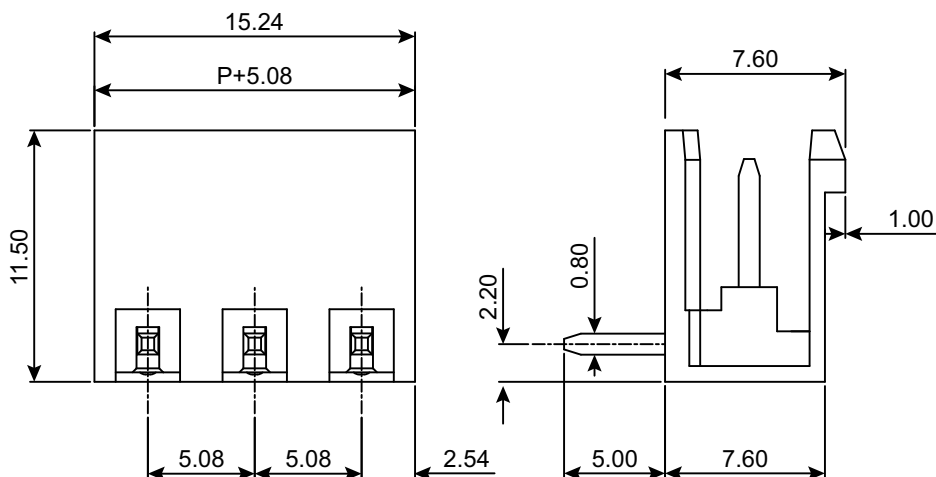

TECHNICAL SPECIFICATIONS :

Pitch	: 5.08 mm
Nominal Rating	: 12A/300V
Dielectric Strength	: >2 kV
Moulded Material	: PA66 - UL94 V0 or V2
Insulation Resistance	: >1000 M Ω @ 500 Vdc
Terminal	: Tin Plated Copper Alloy

Approval Data

UL : 300V / 12A / 28-12 AWG
cUL : 300V / 12A / 28-12 AWG
CE : 300V / 15A / 28-12 AWG

ORDERING CODE

Series	Poles	Grade
--------	-------	-------

COM 90/n [O] M P

Number of Poles: 2 to 14

Grade: P or C

P = Professional Grade

C = Economy Grade

Off/Works: 830/2, GIDC Estate, Makarpura, Vadodara- 390010

Office: +91 - 9227979802 / 4 | Sales: +91-9227979801

Email: sales@vitalelectrocomp.com | Web: www.vitalelectrocomp.com

Note: Technical specifications are subject to change without prior notice

Copyright© 2024 by Vital Electrocomp. All Rights Reserved