



TM

VITAL

Electrocomp



Google Us : Vital Connectors

Manufacturer of PCB Terminal Blocks, Fuse Holders, Barrier Terminals, & Switches

Series 1016S







Screw Type(Cage-Clamp Design) Connectors

1016S
4 interlocked

Plug Shows

1016S
2 interlocked

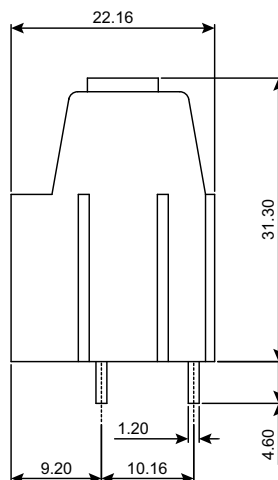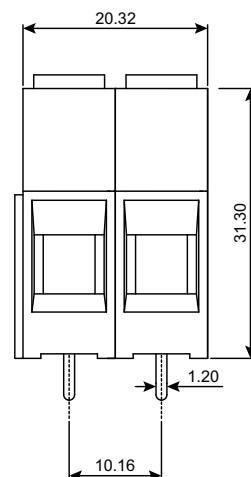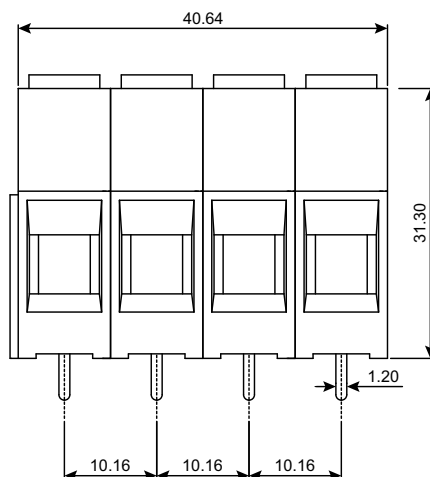

TECHNICAL SPECIFICATIONS :

Pitch	: 10.16 mm
Nominal Rating	: 65A/1000V
Dielectric Strength	: >2 kV
Moulded Material	: PA66 - UL94 V0 or V2
Insulation Resistance	: >1000 M Ω @ 500 Vdc
Terminal	: Tin Plated Copper Alloy
Wire Cage	: Brass Nickel Plated
Screw	: M4 x 0.70 mm
	: Brass Tin Plated Suffix "P"
	: MS Trivalent Zinc Plated Suffix :C"
Wire Size	: 12.00 mm ²
Maximum Torque	: 1.00 - 1.1 Nm

ORDERING CODE

Series	Poles	Grade
--------	-------	-------

1016S C

Grade: P or C

P= Professional Grade

C= Economy Grade

Approval Data

CE :65A / 1000V

Off/Works: 830/2, GIDC Estate, Makarpura, Vadodara- 390010

Office: +91 - 9227979802 / 4

Sales: +91-9227979801

Email: sales@vitalelectrocomp.com

Web: www.vitalelectrocomp.com

Note: Technical specifications are subject to change without prior notice

Copyright© 2024 by Vital Electrocomp. All Rights Reserved