



TM

VITAL

Electrocomp



Google Us : Vital Connectors

Manufacturer of PCB Terminal Blocks, Fuse Holders, Barrier Terminals, & Switches

Micro Switches


Series VMS Lever Screw Type




TECHNICAL SPECIFICATIONS :

Moulded Material	: PA66 - UL94 V0 or V2
Operating Temperature	: -20° C to +80°C
Mechanical Endurance	: 1 million Cycles
	: mA - 100k Cycles
Electrical Endurance	: 1 A to 4A - 10K to 20k Cycles
	: 10 A - 6000 Cycles (Silver Rivets)
Operating Force From	: 50 gms to 450 gms available
	: *Force reflecting basic switch only
Terminals	: Nickel or Tin or Silver plated Copper Alloy
Standard Rivets	: Electrolytic Copper/Bi-metallic Silver
Contact Resistance	: <20 mΩ
Dielectric Strenght	: > 2 kV
Insulation Resistance	: 2000 MΩ @ 500 Vdc
Screw	: Brass Nickel Plated
	: MS Zinc plated (RoHS)
Connection Type	: Screw Type or Lug Type
Metal Roller	: Short, Medium, Long

Lever Screw Type P1

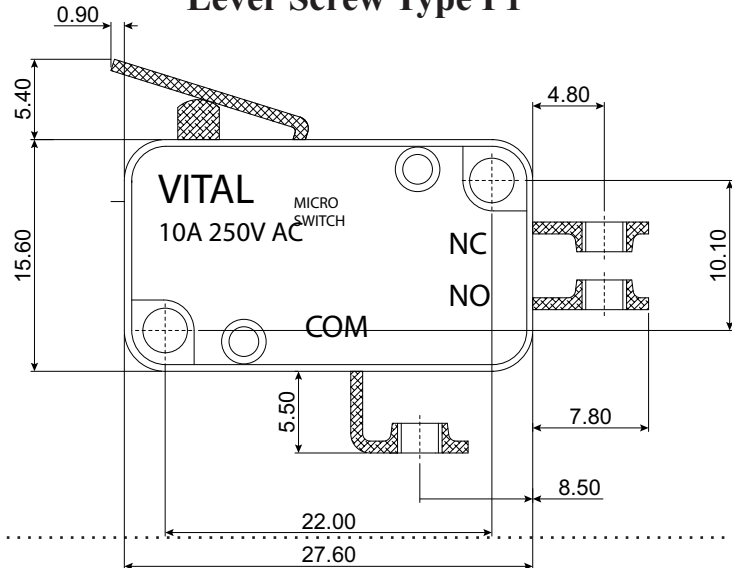

Lever Screw Type P2

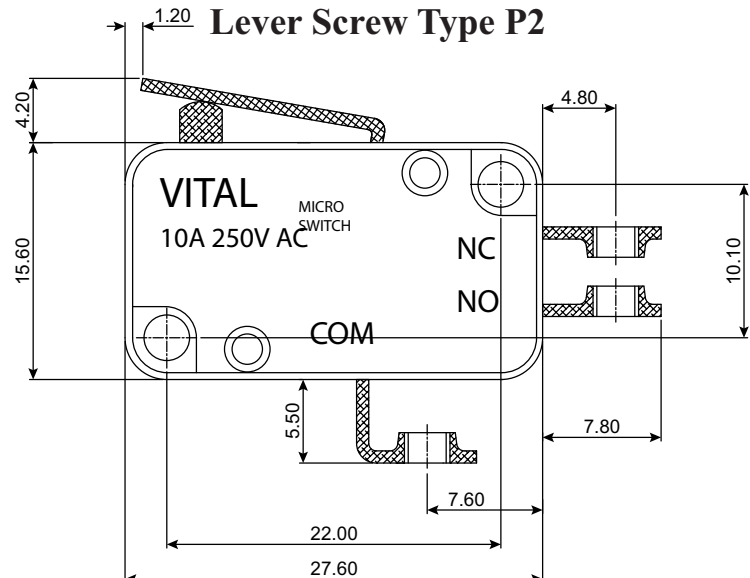

Off/Works: 830/2, GIDC Estate, Makarpura, Vadodara- 390010

Office: +91 - 9227979802 / 4

Sales: +91-9227979801

Email: sales@vitalelectrocomp.com

Web: www.vitalelectrocomp.com

Note: Technical specifications are subject to change without prior notice

Copyright© 2024 by Vital Electrocomp. All Rights Reserved