



TM

# VITAL

Electrocomp





Google Us : Vital Connectors

Manufacturer of PCB Terminal Blocks, Fuse Holders, Barrier Terminals, & Switches

Pluggable Connectors


## Series 7COM 90 F

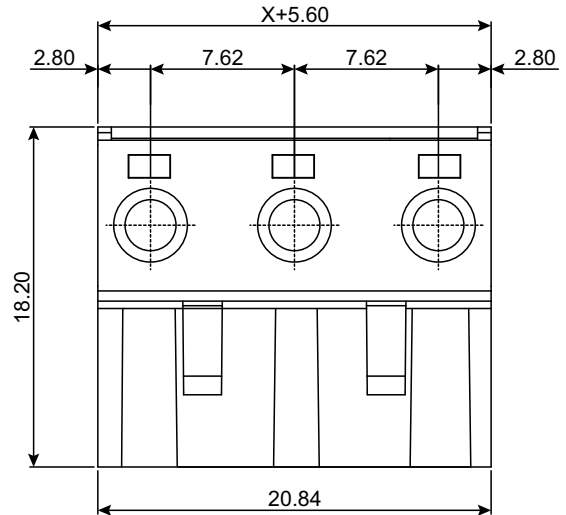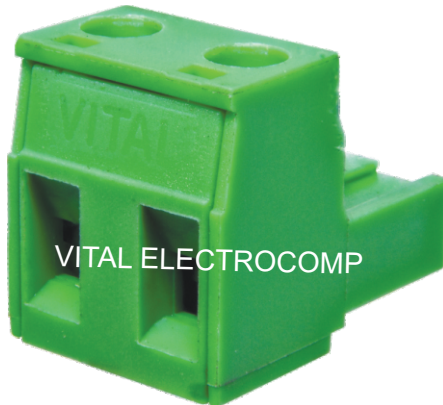

Picture shows 2 pole version of the product

## TECHNICAL SPECIFICATIONS :

Pitch	: 7.62 mm
Nominal Rating	: 12A/300V
Dielectric Strength	: >2 kV
Moulded Material	: PA66 - UL94 V0 or V2
Insulation Resistance	: >1000 M $\Omega$ @ 500 Vdc
Terminal	: Tin Plated Copper Alloy
Wire Cage	: Nickel Plated Brass
Screw	: M3 x 0.50 mm
	: Brass Nickel Plated Suffix "P"
	: MS Trivalent Zinc Plated Suffix "C"
Wire Size	: 2.5 mm <sup>2</sup>
Maximum Torque	: 0.50 - 0.60 Nm

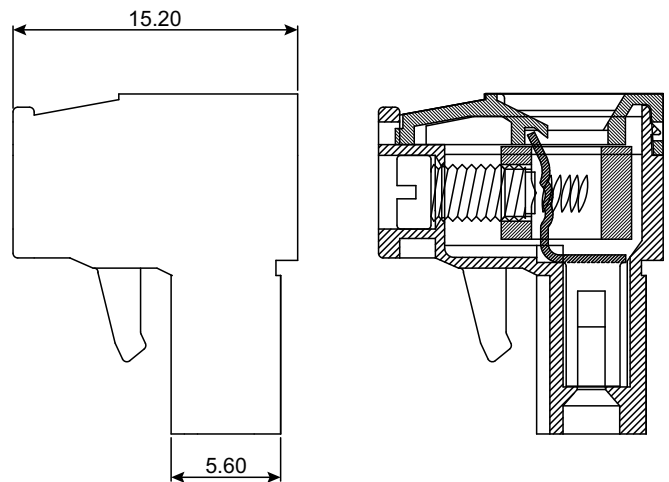

## ORDERING CODE

Series	Poles	Grade
--------	-------	-------

7COM 90/n F P  
n= Number of Poles: 2 to 4  
Grade: P or C

P= Professional Grade  
C= Economy Grade

## Approval Data

CE :12A / 300V

Off/Works: 830/2, GIDC Estate, Makarpura, Vadodara- 390010

Office: +91 - 9227979802 / 4 | Sales: +91-9227979801

Email: sales@vitalelectrocomp.com | Web: www.vitalelectrocomp.com

Note: Technical specifications are subject to change without prior notice

Copyright© 2024 by Vital Electrocomp. All Rights Reserved